


Survey Instructions

Measurements:

Note: Measure the glass size only.

- Measure the visible glass width at 3 different points as shown. Use the smallest measurement as the blind width.
- Measure the drop
- Check the rubber bead type
- Fill out the order form

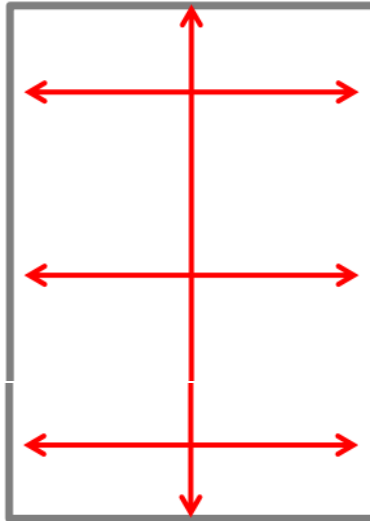

Tensioned Bead Fit/Guided Bead Fit			
Max Width	1000mm	Min Width	250mm
Max Drop	2000mm	Min Drop	250mm
Max Area	2m ²	Min Bead Depth	N/A

Tensioned Screw Fit			
Max Width	1400mm	Min Width	250mm
Max Drop	2000mm	Min Drop	250mm
Max Area	2.5m ²	Min Bead Depth	16mm

